

# Tiandy



## TC-C35LP Spec:I8W/A/E/Y/M/H/2.7-13.5mm/V4.0

# 5MP Super Starlight Motorized IR Bullet Camera

Pro Series



### KEY FEATURES

- Metal Housing
- Motorized Lens 2.7-13.5mm
- Up to 3072×1728@30fps, 1920×1080@60fps
- S+265/H.265/H.264/M-JPEG
- Min. illumination Color: 0.0004Lux@F1.3
- Smart IR, IR Range: 80m
- Built in Mic&Speaker
- Support Human/Vehicle Classification
- Support Face Capture
- Support Early warning
- Operating Conditions -35°~65°, 0~95% RH
- DC12V,POE
- IP67



**Tiandy Technologies Co.,Ltd.**

Email: [sales@tiandy.com](mailto:sales@tiandy.com)

Tel: +86-22-58596065

Website: [en.tiandy.com](http://en.tiandy.com)

Fax: +86-22-58596048



## SPECIFICATIONS

<b>Camera</b>	
Image Sensor	1/1.8"CMOS
Min. Illumination	Color:0.0004Lux@(F1.3,AGC ON),B/W:0Lux with IR
Shutter Time	1s-1/100000s
Day&Night	IR-cut filter with auto switch (ICR)
WDR	120dB
S/N	>43dB
Angle Adjustment	0-360°;0-90°;0-360°
<b>Lens</b>	
Lens Type	Motorized
Focal Length	2.7-13.5mm
Lens Mount	Φ16
Aperture Range	F1.3,DC-iris
Field of View	106.9°-48.7°(H);57.2°-27.4°(V);121.2°-55.9°(D)
DORI Distance	Detect:37m-160m Observe:14.5m-63.5m Recognize:7.5m-32m Identify:3.5m-16m
<b>Illuminator</b>	
IR LEDs	4
IR Distance	80m
Wavelength	850nm
White LEDs	3
Whitelight Distance	15m
<b>Compression Standard</b>	
Video Compression	S+265/H.265/H.264B/H.264M/H.264H/Motion JPEG
Video Bit Rate	32k-16Mbps
Audio Compression	G.711A/G.711U/ADPCM_D/AAC_LC
Audio Sampling Rate	8kHz/32kHz/48kHz

# Tiandy


Image	
Max. Resolution	3072x1728@30fps
Main Stream	PAL:25fps(3072x1728,2560x1440,2304x1296) 50fps(1920x1080,1280x720) NTSC:30fps(3072x1728,2560x1440,2304x1296) 60fps(1920x1080,1280x720)
Sub Stream	PAL:25fps(704x576,704x288,352x288,640x360) NTSC:30fps(704x480,704x240,352x240,640x360)
Third Stream	PAL:25fps(1920x1080,1280x720,704x576,704x288,352x288) NTSC:30fps(1920x1080,1280x720,704x480,704x240,352x240)
BLC	Yes
HLC	Yes
AGC	Yes
3D DNR	Yes
White Balance	Auto/Semi-auto/Manual/Sunny/Natural light/Warm light/Sodium lamp/Incandescent lamp/Locked white balance
ROI	8 regions
Corridor mode	Yes
EIS	N/A
OSD	5regions;16*16/32*32/48*48/64*64/96*96
Picture Overlay	1 region
Privacy Mask	4 regions
Defog	Yes
Feature	
Alarm Trigger	Motion Detection;Mask Alarm;Voltage Alarm;Disk Full;Disk R/W Error;IP Address Conflict;MAC Address Conflict;FTP Server Exception ;Event Input, Event Output
Linkage Method	send email;trigger sound;trigger warmlight;trigger recording;trigger capture;notify surveillance center
Video Analytics	Human/Vehicle Classification;Tripwire;Double Tripwire;Perimeter;Object Abandon;Object Lost;Heatmap;Loitering;Running;Parking;People Counting;Crowed;Safety Helmet Detection;On Duty Detection;Video Abnormal;Audio Abnormal

# Tiandy

Rules of behavior analyse in 1 scene	8
Early Warning(EW)	Early Warning(EW)
Auto-Tracking	N/A
Face Mode	Face Capture
Face Detection Performance	Detects up to 32 faces at the same scene;Detects up to 16 faces at the same scene
<b>Network</b>	
ANR	ANR
Protocols	HTTP;HTTPS;TCP/IP;UDP;UPnP;ICMP;IGMP;SNMP;DHCP;DNS;DDNS;Easy DDNS;NTP;SMTP;SSL;802.1X;QoS;IPv4;IPv6;PPPOE;SSH;Unicast;Multicast;RTCP;ARP;SRTP;RTSP;FTP;SFTP;NAS
System Compatibility	onvif Profile S/T/G/M;CGI;MIL STONE;RTMP
Remote Connection	≤2
Client	Easy7 Smart Client
Moblie Client	EasyLive Plus
Web	IE10+;Firefox52+;Edge89+;Safari11+;Chrome57+
<b>Interface</b>	
Communication Interface	1 RJ45 10M/ 100M self adaptive Ethernet port
Audio I/O	1channel in;1channel out
Alarm I/O	2channel in,3mA,3.3VDC;1channel out,1A,24VDC
Built-In Mic	Yes
Built-In Speaker	Yes
Reset Button	Yes
On-board storage	Built-in Micro SD card slot, up to 512 GB
Additional interfaces	1 channel RS-485
<b>General</b>	
Web Client Language	19languages Simple Chinese/Traditional Chinese/English/Spanish/Korean/Italian/Turkish/Russian/Thai/French/Polish/Dutch/Hebrew/Arabic/Vietnamese/German/Ukrainian/Portuguese/Albanian
Operating Temperature	-35°C-65°C
Operating Humidity	0-95%
Storage Temperature	-35°C-65°C
Storage Humidity	0-95%(non-condensing)
Power Supply	DC12V±25%,MAX 14W;POE 802.3at,MAX 15.5W
Protection	Surge protection 2000V;Lightning proof 6000V;IP67
Boundary Dimensions	327(L)114(W)105(H)mm
Package Dimensions	360(L)150(W)170(H)mm
GrossWeight	1.83kg
NetWeight	1.48kg

# Tiandy

## DIMENSIONS (Unit: mm)

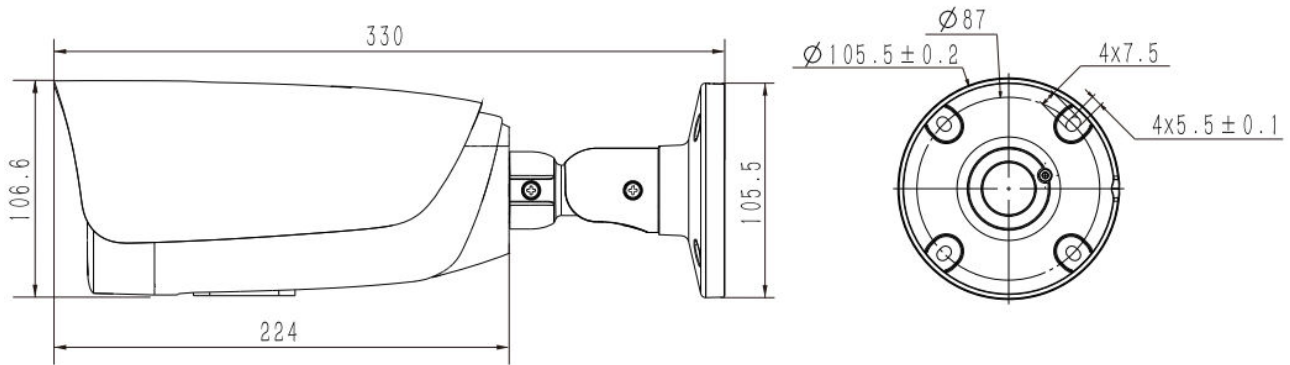

## ACCESSORIES



Tiandy Technologies Co.,Ltd.

Email: sales@tiandy.com Tel: +86-22-58596065  
Website: en.tiandy.com Fax: +86-22-58596048